


# ASSEMBLY

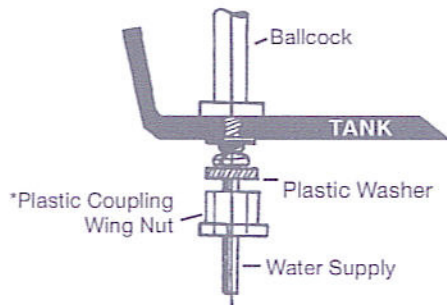

**\*DO NOT OVERTIGHTEN.** Overtightening may split the ballcock shank and void the warranty.

## PARTS LIST

- 2 Brass Tank-To-Bowl Bolts
- 2 Brass Hex Nuts
- 4 Rubber flat washers
- 2 Flat Washers
- 1 Tank-To-Bowl Gasket
- 1 Trip Lever w/Nut (Reverse Thread)
- 1 Plastic Washer
- 1 Plastic Ballcock Supply
- 3 Channel cushions

**NOTE:** Do not use pipe or rubber parts.

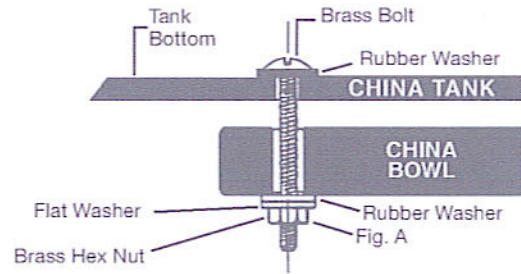


Fig. A Push down on the top of the tank, one side at a time, alternating back and forth, to tighten bottom nuts until bowl is level and in contact with channel cushions.  
**Do Not Overtighten** or piece may crack.



Better Lifestyles, Inc.  
P.O. Box 41780


**Note:** If the "Rubber Tank-to-Bowl" (#17) gasket is black instead of orange then discard the "Channel Cushions" (#25).

**TBES**  
Toilet Bowl Exhaust System

1. Trip Lever
2. Water Supply Connection
3. Plastic Washer
4. Supply Coupling Wing Nut
5. Water Supply Line (Not Included)
6. Stainless Steel Flat Washers (Not Included)
7. Brass Hex Nuts
8. Plastic Bolt Cover
9. Acorn Nut (Not Included)
10. Exhaust Port
11. Plastic Cap Hold Down Washer
12. Wax Bowl Seal (Not Included)
13. Bowl Hold-Down Bolts (Not Included)
14. Tank
15. Brass Tank-To-Bowl Bolts
16. Rubber Washer
17. Rubber Tank-To-Bowl Gasket
18. Flat Washers
19. Rubber Washer
20. Bowl
21. Floor Flange (Not Included)
22. Extend and Shape Coupler (Not Included)
23. Josh Coupler
24. Tank Lid
25. Channel Cushions

**G-7 Tank**

**G-101 Bowl**

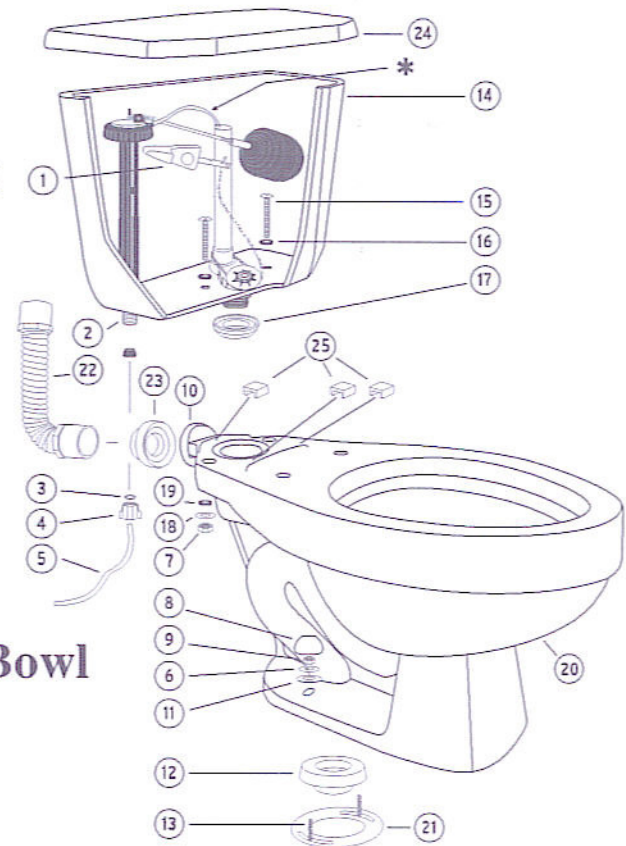

**\* Important.** Be sure overflow tube crosses over float rod.